




Always/Never Guide

DOUBLE ROMAN COMPOSITE TILE

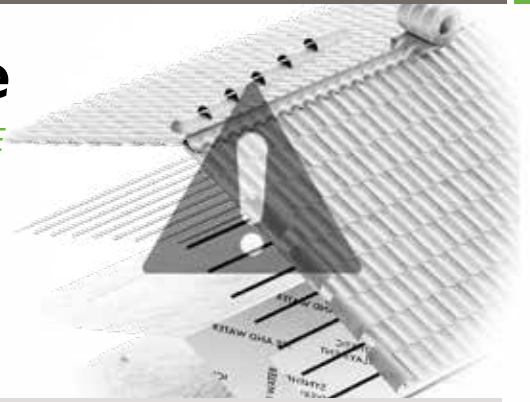

ALWAYS

- ✓ **Always** lay out the roof so that all horizontal rows have equal exposure.
- ✓ **Always** install the lower metal eave closure resting comfortably on the drip edge.
- ✓ **Always** “hang” or interlock several tiles and align before fastening.
- ✓ **Always** secure each tile at two points; screws, nails, tie wires, adhesive, etc.
- ✓ **Always** use Quarrix fasteners, or comparable stainless steel fasteners.
- ✓ **Always** use adhesives that are specially formulated for HDPE plastics.
- ✓ **Always** cover deck with quality ice and water shield and synthetic underlayments.
- ✓ **Always** follow installation guide when forming tile flashings.
- ✓ **Always** shuffle/mix tile from different bundles and different pallets.
- ✓ **Always** follow the Quarrix Composite Tile Installation Guide.

NEVER

- ✗ **Never** exceed the maximum exposure of 13-1/2”.
- ✗ **Never** let the lower metal eave closure hang over the drip edge.
- ✗ **Never** secure one tile at a time, as horizontal alignment will be very difficult.
- ✗ **Never** rely on one point, one method; even with small cut pieces.
- ✗ **Never** use fasteners that can corrode and fail.
- ✗ **Never** use general adhesives that will not bond to HDPE.
- ✗ **Never** install tile over existing shingles.
- ✗ **Never** use typical flat shingle type flashings.
- ✗ **Never** create potential color variations with adjacent bundles or pallets.
- ✗ **Never** be afraid to contact Quarrix directly at 800.438.2920 for any assistance.