

FLEX ROLL RIDGE VENT

Overview

Flex Roll is a soft roll, low-profile ridge vent made of non-wicking and non-woven material that resists clogging. Lightweight and easy-to-install; no complicated fitting, wrapping or connectors.

Quarrix Flex Roll works to vent warm, moist attic air out while preventing insects, birds, bats, snow and dust from getting in. Installs under metal and asphalt shingles (pitches from 3/12 to 20/12). Coil nails included.



Lifetime Warranty

Quarrix Flex Roll Ridge Vent Benefits

- Proven Performance**
 Low-profile design virtually disappears on the roof when installed, yet exhausts warm attic air to create a balanced system. Fibers prevent dust and debris from clogging the vent.
- Strong and Durable**
 Material is non-wicking and non-woven, and helps **keep rain, snow and insects from filtering through**. Flex Roll will not degrade or corrode from rain, wind, snow or ice.
- Product Versatility**
 Installs on ridge for exhaust or behind fascia for intake. Works with metal and asphalt shingles.
- Ecologically Friendly**
 Helps reduce landfill waste through the use of 100% recycled material.




FLEX ROLL SPECIFICATIONS 1 3/4" (44 mm) Coil Nails Included

Part #	Series	Width	Length	Profile Height	Certified NFA	Pitches	Warranty
70000	F105	10-1/2" (26.7 cm)	20' (6 m) Roll				
70006	F105	10-1/2" (26.7 cm)	50' (15.2 m) Roll	3/4" (1.9 cm) Low Profile	17.2 sq in/lin ft (364.1 cm ² /lin m)	3/12 to 20/12	Lifetime Warranty
70003	F120	11-3/4" (29.8 cm)	20' (6 m) Roll				
70005	F80	8" (20.3 cm)	20' (6 m) Roll				

SS-FLEX09-2.2.17

QUARRIX FLEX ROLL RIDGE VENT INSTALLATION INSTRUCTIONS


Quick & Easy Installation

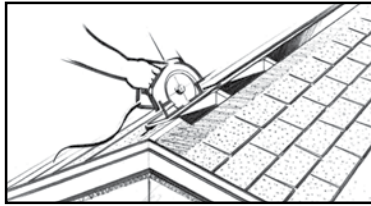

1 Cut a 2" Slot


Cut a 1" slot on each side of the ridge. Length of slot should be determined by the amount of required ventilation. See ventilation table below.

A minimum of 12" must be left uncut on each end of the ridge.

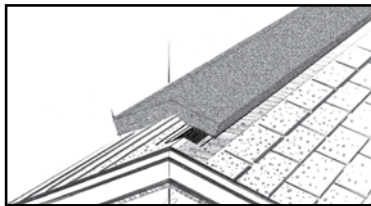

2 Roll out Quarrix Flex Roll

Roll out the Flex Roll along entire ridge. Multiple lengths may be butted together. Nail both ends of vent, nails must penetrate sheathing $\frac{3}{4}$ ". If using nail gun, adjust the air pressure so the ridge vent is not over-compressed.

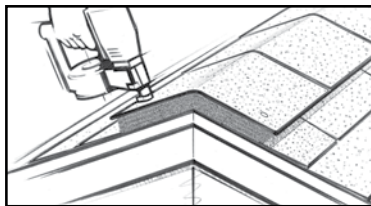

3 Nail Ridge Caps


Nail ridge caps directly over the Flex Roll, using a coil nail gun or hand nail. Nails must penetrate sheathing $\frac{3}{4}$ ".

Recommended for roof slopes 3:12 to 20:12

1 $\frac{3}{4}$ " (44 mm) Coil Nails Included

Determining Ventilation Needs

For $\frac{3}{4}$ " thick Quarrix Flex Vent (17.2 square inches net free area (NFA) per foot) and Soffit Vents or Quarrix Multi-Use Vent (6.35 square inches net free ventilation area (NFVA) per foot)



Attic Square Footage	Square Inches NFVA at Ridge	Min. Feet of Quarrix Flex Vent Soft Roll	Min. Square Inches NFVA Soffit
1000	240	14	240
1100	264	16	264
1200	288	17	288
1300	312	18	312
1400	336	20	336
1500	360	21	360
1600	384	23	384
1700	408	24	408
1800	432	25	432
1900	456	27	456
2000	480	28	480
2100	504	30	504
2200	528	31	528
2300	552	33	552
2400	576	34	576

* Double these numbers when using the 1:150 ratio.



Made from 100% recycled material