

EUROPEAN STONE COATED STEEL D2D




SHAKED2D



SHINGLED2D

An innovative panel that interlocks for fast and easy direct-to-deck (D2D) installation. The **invisifastener™** design keeps screws hidden from view for a beautiful roof. Manufactured from corrosion resistant steel and coated in quartz stone granules, our stone coated steel specialty roofing will add longevity and appeal to your roof for years to come.

- Direct-to-Deck Installation
- Interlocking Panels
- Hidden Fasteners
- Class A Fire Rating
- Class 4 Impact Rating
- Severe Weather Resistant
- Corrosion Resistant
- Complete Accessory System
- Lifetime Limited Warranty

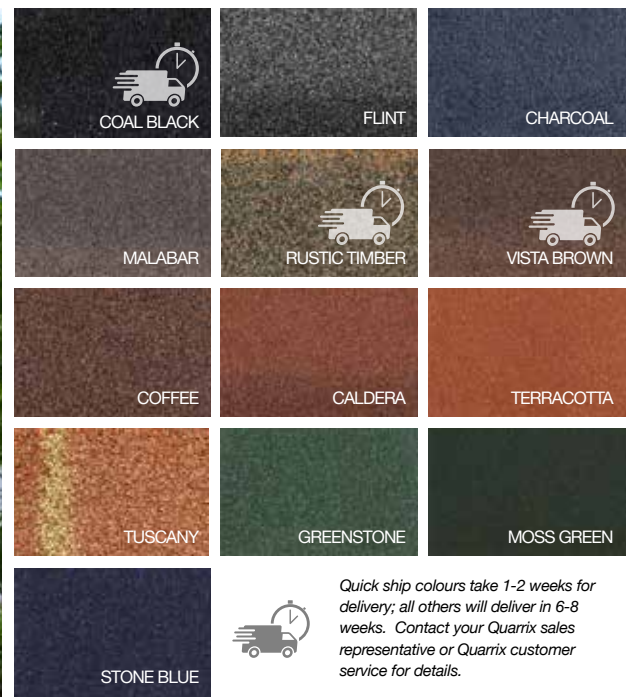



SHAKED2D

European Stone Coated Steel



OVERALL DIMENSIONS*	52.36" x 16.57"	1330 x 421 mm
COVER DIMENSIONS*	48.50" x 14.75"	1232 x 375 mm
PITCH	2/12 - Vertical	10° - 90°
GAUGE OF STEEL†	26 gauge	0.41 mm
LINEAL COVER WIDTH*	48.03"	1220 mm
COVERAGE*	20.28 pc/square	2.18 pc/m ²
COVERAGE OF A PANEL	4.93 ft ²	0.46 m ²
WEIGHT PER PANEL	7.25 lbs	3.29 kg
WEIGHT PER SQUARE	145 lbs	65.8 kg
PIECES PER PALLET	256	256
WEIGHT PER PALLET	1,858.50 lbs	843 kg
PALLET DIMENSIONS	55.12" x 43.3"	1400 x 1100 mm

* With a tolerance of ± 5 mm on measurements and minimal tolerance in weight.
 † Steel thickness according to the EN 10346.



SHINGLED2D

European Stone Coated Steel



OVERALL DIMENSIONS*	52.36" x 16.57"	1330 x 421 mm
COVER DIMENSIONS*	48.50" x 14.75"	1232 x 375 mm
PITCH	2/12 - Vertical	10° - 90°
GAUGE OF STEEL†	26 gauge	0.41 mm
LINEAL COVER WIDTH*	48.03"	1220 mm
COVERAGE*	20.28 pc/square	2.18 pc/m ²
COVERAGE OF A PANEL	4.93 ft ²	0.46 m ²
WEIGHT PER PANEL	7.25 lbs	3.29 kg
WEIGHT PER SQUARE	145 lbs	65.8 kg
PIECES PER PALLET	256	256
WEIGHT PER PALLET	1,858.50 lbs	843 kg
PALLET DIMENSIONS	55.12" x 43.3"	1400 x 1100 mm

* With a tolerance of ± 5 mm on measurements and minimal tolerance in weight.
 † Steel thickness according to the EN 10346.



TESTING	RESULTS
Class A Fire Rating	Tested and passed fire classifications Class A and Class C in accordance with ANSI/UL790 (ASTM E108) and qualify for use under section 1505.1 of the 2012, 2009 and 2006 International Building Code (IBC) and Section R902.1 of the 2012, 2009 and 2006 International Residential Code (IRC) and are eligible for Listing under TFX.
Miami-Dade	D2D not certified. (See one of our other 8 profiles - Quarrix batten install stone coated steel has been tested and passed for wind driven rain resistance in accordance with Test Application Standard (TAS) 100.
Wind Uplift	Tested and passed for wind uplift in accordance with ANSI/UL 580/1897 complying with Section 1504.3.2 of the 2012, 2009 and 2006 IBC. [120mph wind warranty]
Weathering Performance	Tested and passed the criteria for accelerated weathering with ASTM G155 in accordance with Section 1504.6 of the IBC.
Corrosion	Complies with Section 1507.4.3 of the 2012, 2009, and 2006 IBC and Section 905.10.3 of the 2012, 2009, and 2006 IRC have been tested and passed corrosion in accordance with ASTM B117.
Class 4 Impact Resistance	Tested and passed the criteria for ANSI/UL 2218, Standard for Impact Resistance of Prepared Roof Coverings and are eligible for listing under TGAM.

Actual colours may vary from printed representation. Home images represent one of our many profiles.