

QUARRIX EZ-PLUG PATCH




Overview

Using sheet metal to patch holes in the roof deck can create a place for condensation to drip into the attic and may not void your shingle warranty. Try a better way with the Quarrix EZ-PLUG™ Patch.

Quarrix EZ-PLUG Patch Benefits:

- > Patch holes left by pot vents, turtlebacks, or whirlybirds
- > Gun-nailable material won't expand or contract in extreme weather
- > 12 times faster than plywood patches
- > Two sizes available - 8" and 12"

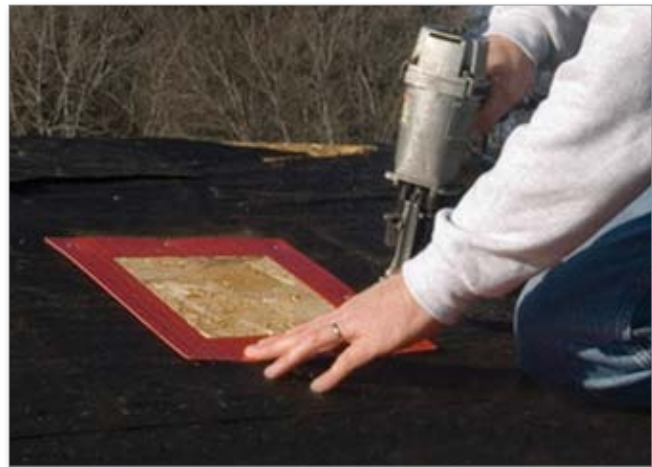

EZ-PLUG 8 INCH PATCH

Ideal size plug for filling holes left by Pot/Turtle Vents.



EZ-PLUG 12 INCH PATCH

Ideal size for filling holes left by Whirlybird/Turbine vents.

QUARRIX EZ-PLUG PATCH SPECIFICATIONS

Part #	Patch Size	Outside Dimensions	Wood Dimensions	Thickness	Material	Weight Limit
97046	8" Patch	11-7/8" x 11-7/8"	7-1/2" x 7-1/2"	7/16"	ABS Plastic and 7/16" OSB Sheeting	Over 600 lbs.
98000	12" Patch	15-7/8" x 15-7/8"	11-1/2" x 11-1/2"	7/16"	ABS Plastic and 7/16" OSB Sheeting	Over 600 lbs.

*Installation instructions on back

QUARRIX EZ-PLUG PATCH INSTALLATION



8 INCH PATCH

Step 1




Remove traditional vent and trim to 8" x 8"

Step 2



Center EZ-PLUG in hole

Step 3



Nail down by hand or nail gun

Step 4



Place 8 nails into flanges as shown above

12 INCH PATCH

Step 1



Remove traditional vent and trim to 12" x 12"

Step 2



Center EZ-PLUG in hole

Step 3



Nail down by hand or nail gun

Step 4



Place 12 nails into flanges as shown above

For more information contact your supplier or visit the online dealer locator!

quarrix.com
800.438.2920



SCAN BARCODE FOR
INSTALLATION VIDEO



Any Roofing Material

Asphalt Shingles
Cedar Shakes
Flat Tiles
Metal
Stone-Coated Steel

